

## FacePro692/FacePro692F Long-Range Speed Face Device with Mask and Multi Face Detection



## OVERVIEW

FacePro692 series face recognition terminal is a kind of access control device with large screen ratio, which supports multi- face recognition and 1:N face authentication. It can be mainly applied in multiple scenarios, such as dwellings, government buldings, Banks enterprises and so on.

## MAIN FEATURES

- 7-inch LCD touch screen
- 2 MP wide-angle dual-lens
- Adjusts supplement light brightness manually
- Face recognition distance: 0.3 to 3m
- 10,000 face capacity, 10,000 Fingerprint Capacity and 5,00,000 Card Capacity
- 1,50,000 event capacity
- Deep learning algorithm
- Support single person and multiple person (upto 5 people) recognition
- Multiple authentication modes
- Face recognition duration < 0.2 s/User; face recognition accuracy rate ≥ 99%




### Digitally Integrated IT Solutions

- Imports card and user data to the device via TCP/IP communication
- Stand-alone operation
- Transmits data to the client software via TCP/IP and Wi-Fi communication and saves the data on the client software.
- Capture linkage and captured pictures saving
- Imports data to the device from the client software
- Manage, search and set device data after logging in the device locally
- Connects to one external card reader or access controller via RS-485
- Connects to external access controller or Wiegand card reader via Wiegand protocol
- Connects to secure door control unit via RS-485 protocol to avoid the door opening when the terminal is destroyed
- Remote live view via RTSP protocol; encoding mode: H.264
- NTP, manually time synchronization, and auto synchronization
- Watchdog design and tamper function
- Supports 6 attendance status, including check in, check out, break in, break out, overtime in, overtime out
- Configuration via web browser

## SPECIFICATION

Parameters	FacePro692 / FacePro692F
Operating system	Linux
Screen	7 inch Capacitive Touch screen
	Resolution 1024 × 600
FOV	HFOV= 75.5°; VFOV= 41.5°; DFOV= 87°
Camera	2 MP dual-lens camera, WDR
Face / Fingerprint capacity	10,000
Face recognition	< 0.2 s per person (duration) and 0.3 to 3m(distance)
Card capacity	50,000
Card type	Mifare card (13.56 Mhz), Desfire card and Felica card
Event capacity	1,50,000
Interface	Rj45 × 1, RS-485 × 1, Wiegand × 1, USB × 1, alarm output × 1, alarm input × 2, lock × 1, door contact × 1, exit button × 1, tamper × 1, Wi-Fi (2.4 G, 802.11b/g/n )
Working Voltage	12 VDC/2 A
Working Temperature	-30 °C to 60 °C (-22 °F to 140 °F)
Working voltage	0 to 90% (no condensing)
Dimensions	110.5 mm × 209.2 mm × 24 mm (4.35" × 8.24" × 0.94")
Weight	Gross Weight : 1.06 kg and Net Weight : 0.57 kg
Functions	Anti - Spoofing
Protection level	IP65

## DIMENSIONS

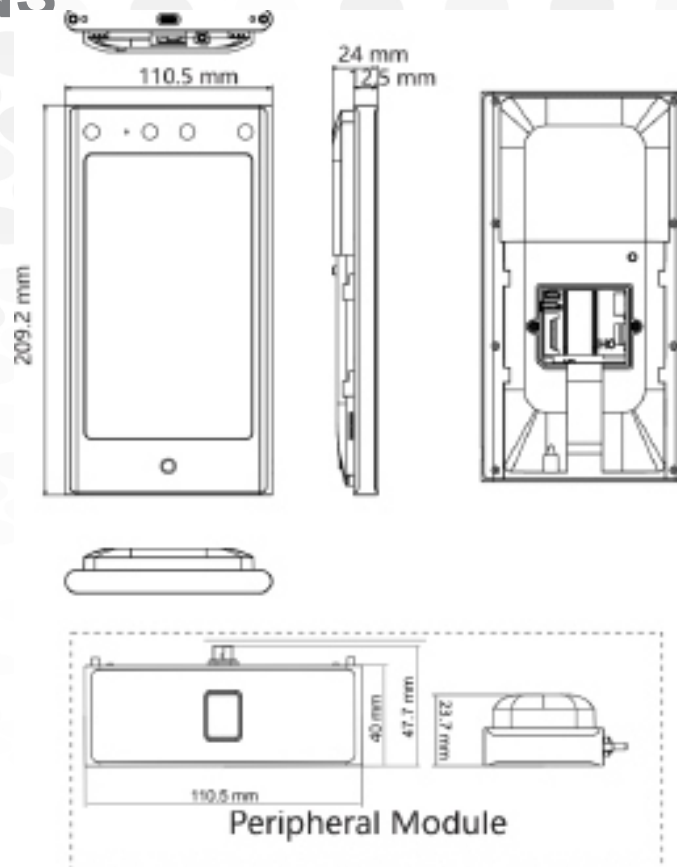

## FacePro692

### Accessory

